





# Guilford of Maine

## Fabric Brochure

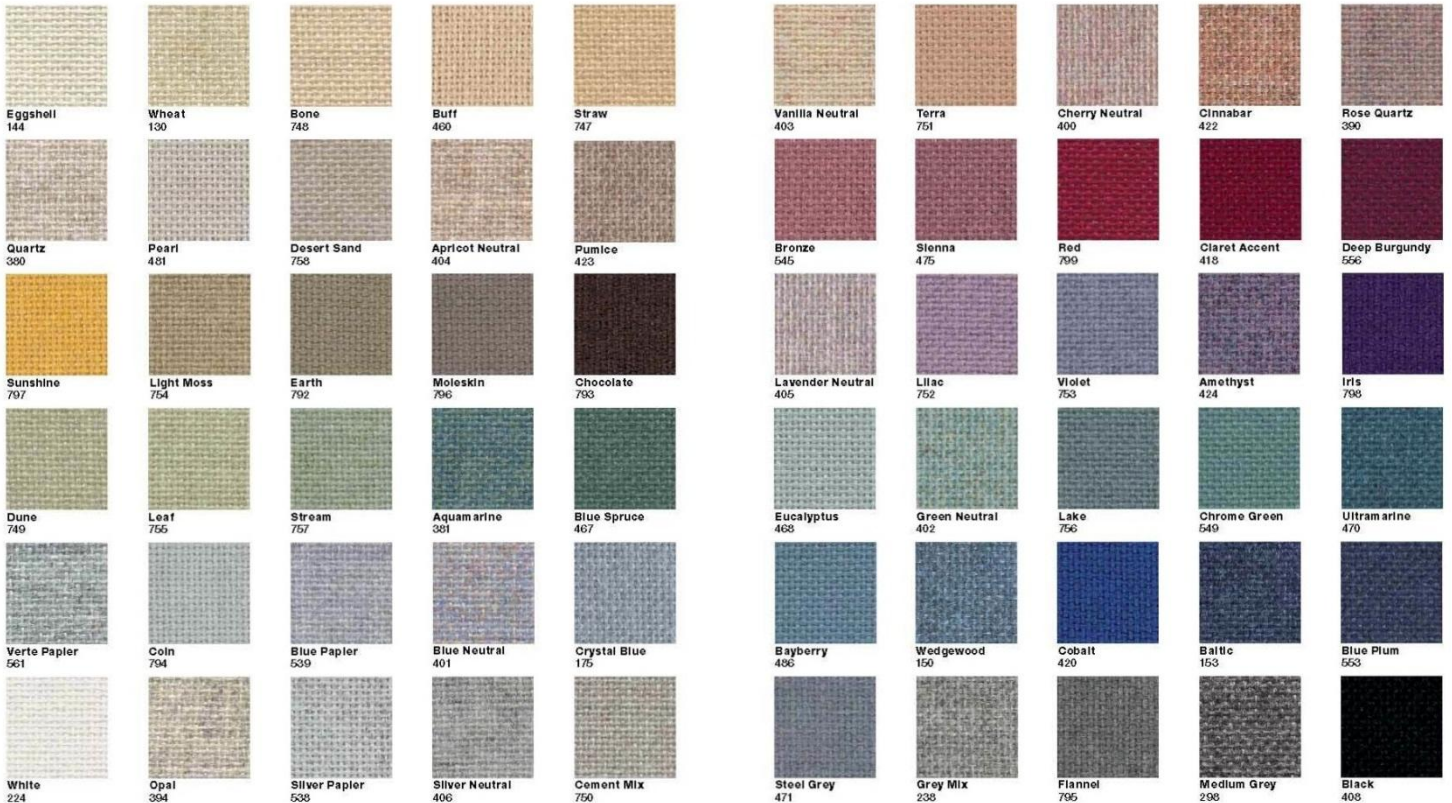

### Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

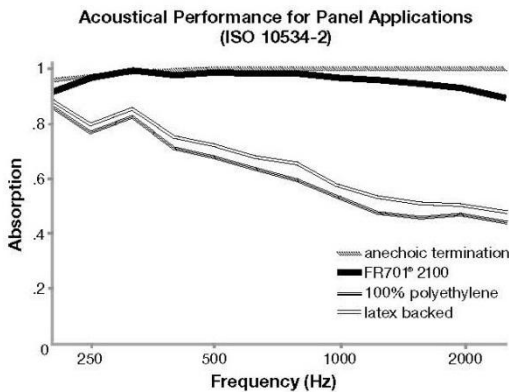

NRC of anechoic termination  
1.00

NRC of fabric in front of anechoic termination  
.95

### Specifications

**Content**  
100% post-consumer recycled polyester

**Weight**  
16.0 ± 0.5 oz./lin. yd.

**Width**  
66" min. useable

**Repeat**  
none

### Miscellaneous

Proudly woven in the USA supporting our local communities.  
Colors may vary slightly between dye lots.  
This is a non-directional fabric.  
Application testing of this product is recommended.

Visit [guilfordofmaine.com](http://guilfordofmaine.com) for complete specs and samples.

### Performance

**Colorfastness to Light (AATCC 16 Option 3)**  
Grade 4 min. at 40 hours

**Colorfastness to Crocking (AATCC 8)**  
Grade 4 min. dry & Grade 3 min. wet

**Breaking Strength (ASTM D5034)**  
150 lbf min. warp and fill

**Flammability (ASTM E84)**  
Class I or A

### Cleaning Code

W-S